


# SAW DPX FOR CDMA800/UMTS BC5 LR type

Murata part number :SAYEV836MAC0F00 [ Tx→ANT]

## Package Dimensions

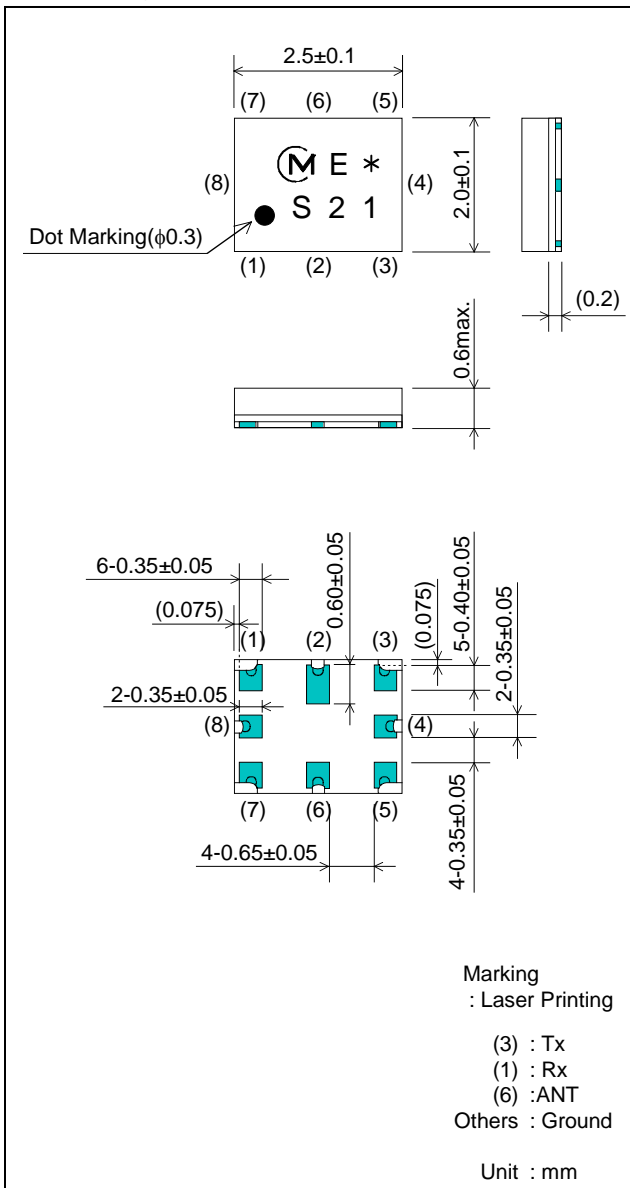



## Specification

Item	Specification		
	-30 to 85°C	25±2°C	typ.
Nominal Center Frequency( $f_c$ )	836.5MHz		
Insertion Loss (824 to 849MHz) (830 to 840MHz)	2.0 dB max.	1.8 dB max.	1.62 dB
	1.75 dB max.	1.65 dB max.	1.56 dB
Absolute Attenuation			
1) 470 to 770 MHz	30 dB min.	30 dB min.	31 dB
2) 869 to 894 MHz	43 dB min.	43 dB min.	46 dB
3) 925 to 960 MHz	30 dB min.	30 dB min.	34 dB
4) 1477 to 1516 MHz	35 dB min.	35 dB min.	43 dB
5) 1573 to 1577 MHz	35 dB min.	35 dB min.	41 dB
6) 1648 to 1698 MHz	30 dB min.	30 dB min.	38 dB
7) 1805 to 1880 MHz	25 dB min.	25 dB min.	34 dB
8) 1884 to 1920 MHz	25 dB min.	25 dB min.	33 dB
9) 1930 to 1990 MHz	25 dB min.	25 dB min.	31 dB
10) 2110 to 2170 MHz	20 dB min.	20 dB min.	29 dB
10) 2400 to 2547 MHz	21 dB min.	21 dB min.	26 dB
10) 3296 to 3396 MHz	10 dB min.	10 dB min.	17 dB
10) 4120 to 4245 MHz	12 dB min.	12 dB min.	21 dB
10) 4900 to 6000 MHz	12 dB min.	12 dB min.	26 dB
Ripple Deviation (824 to 849MHz) (830 to 840MHz)	1.0 dB max. 0.8 dB max.	1.0 dB max. 0.8 dB max.	0.5 dB 0.4 dB
VSWR (824 to 849MHz) (830 to 840MHz)	2.0 max. 2.0 max.	2.0 max. 2.0 max.	1.8 1.8
ANT Port Matching Impedance(normal)	50Ω//9.1nH		
Tx Port Matching Impedance(normal)	50Ω		
Rx Port Matching Impedance(normal)	50Ω		
Input Signal Level	1.0W, 50000 hours (50°C)		

# SAW DPX FOR CDMA800/UMTS BC5 LR type

Murata part number :SAYEV836MAC0F00 [ Tx→ANT]

## Frequency Performance

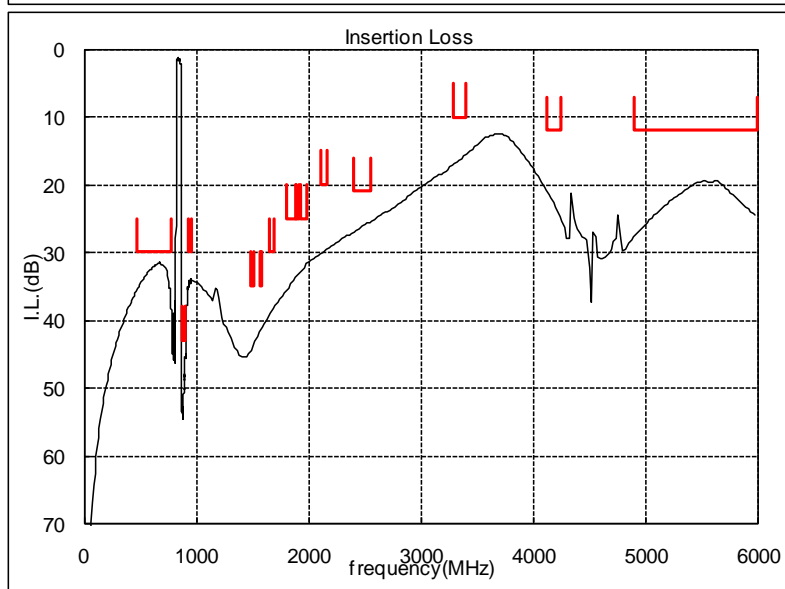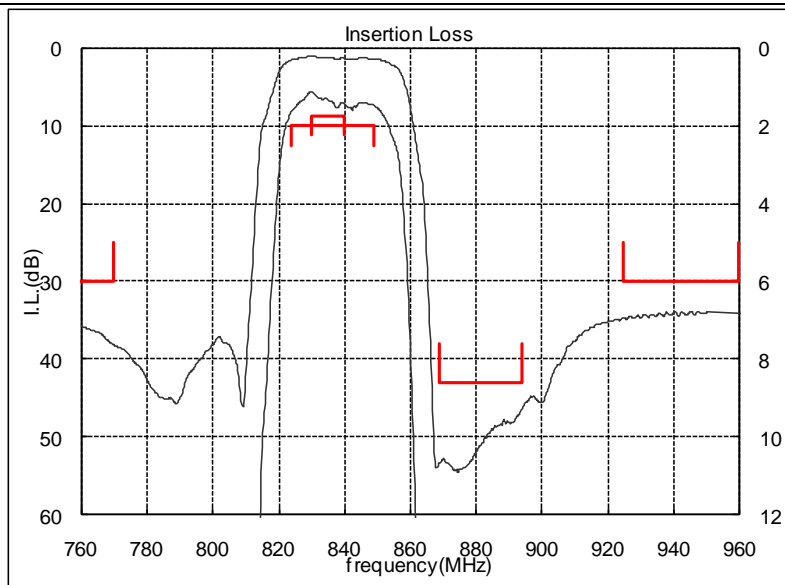


# SAW DPX FOR CDMA800/UMTS BC5 LR type

Murata part number :SAYEV836MAC0F00 [ ANT→Rx]

## Package Dimensions

## Specification


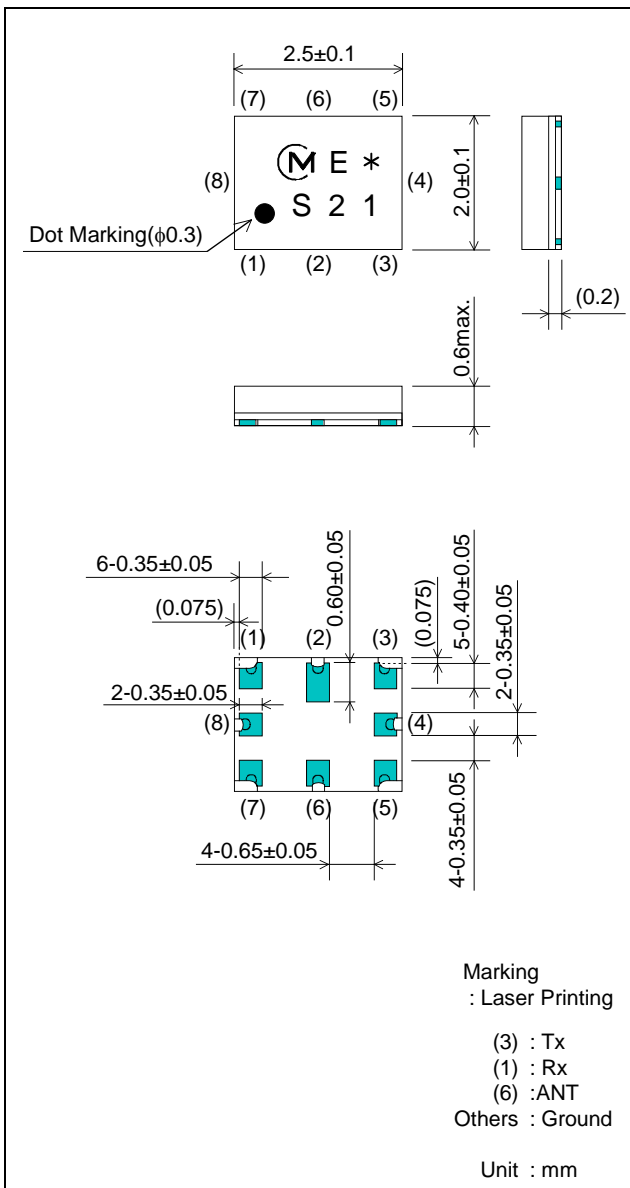


Item	Specification		
	-30 to 85°C	25±2°C	typ.
Nominal Center Frequency(fc)	881.5MHz		
Insertion Loss (869 to 894MHz)	2.65 dB max.	2.4 dB max.	1.87 dB
(875 to 885MHz)	2.1 dB max.	1.9 dB max.	1.36 dB
Absolute Attenuation			
1) 40 to 50 MHz	60 dB min.	60 dB min.	78 dB
2) 434.5 to 447 MHz	35 dB min.	35 dB min.	42 dB
3) 779 to 804 MHz	38 dB min.	38 dB min.	41 dB
4) 824 to 849 MHz	48 dB min.	48 dB min.	50 dB
5) 852.5 to 862.5 MHz	1.5 dB min.	1.5 dB min.	9.8 dB
6) 1603 to 1653 MHz	28 dB min.	28 dB min.	33 dB
7) 1693 to 1743 MHz	25 dB min.	25 dB min.	30 dB
8) 1738 to 1788 MHz	24 dB min.	24 dB min.	28 dB
9) 2400 to 2497 MHz	30 dB min.	30 dB min.	39 dB
10) 2517 to 2592 MHz	30 dB min.	30 dB min.	42 dB
11) 2607 to 2682 MHz	30 dB min.	30 dB min.	44 dB
12) 3341 to 3441 MHz	40 dB min.	40 dB min.	51 dB
13) 3476 to 3576 MHz	33 dB min.	33 dB min.	44 dB
14) 4345 to 4470 MHz	28 dB min.	28 dB min.	42 dB
15) 5214 to 5364 MHz	10 dB min.	10 dB min.	18 dB
Ripple Deviation (869 to 894MHz)	1.5 dB max.	1.5 dB max.	0.7 dB
(875 to 885MHz)	1.0 dB max.	1.0 dB max.	0.2 dB
VSWR (869 to 894MHz)	2.0 max.	2.0 max.	1.6
(875 to 885MHz)	2.0 max.	2.0 max.	1.5
ANT Port Matching Impedance(normal)	50Ω/9.1nH		
Tx Port Matching Impedance(normal)	50Ω		
Rx Port Matching Impedance(normal)	50Ω		

# SAW DPX FOR CDMA800/UMTS BC5 LR type

Murata part number :SAYEV836MAC0F00 [ANT→Rx]

## Frequency Performance

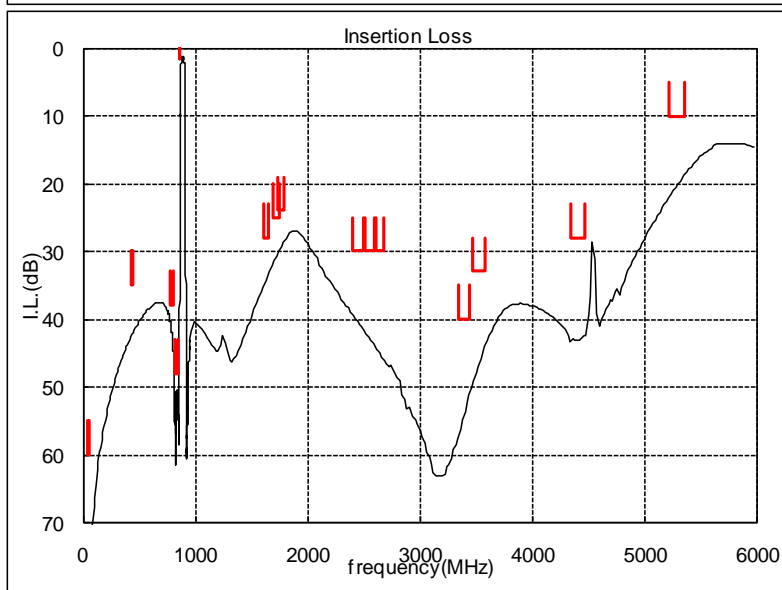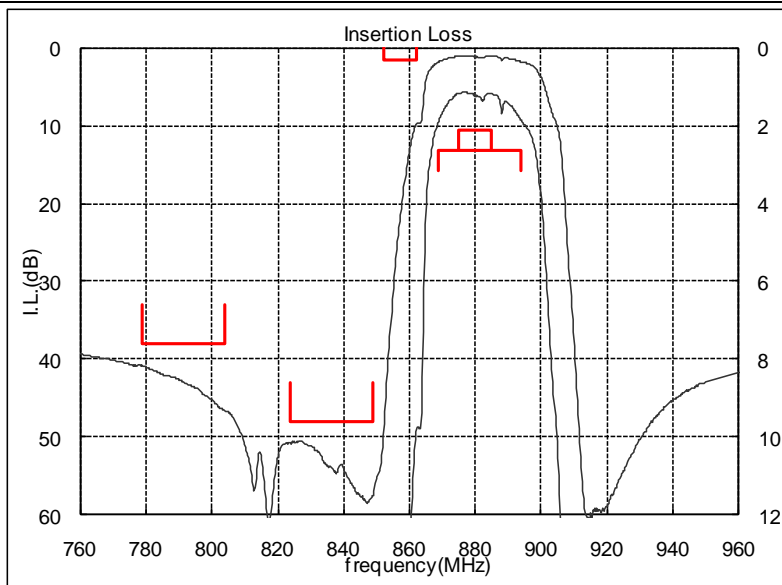


# SAW DPX FOR CDMA800/UMTS BC5 LR type

Murata part number :SAYEV836MAC0F00 [Tx→Rx]

## Package Dimensions

## Specification


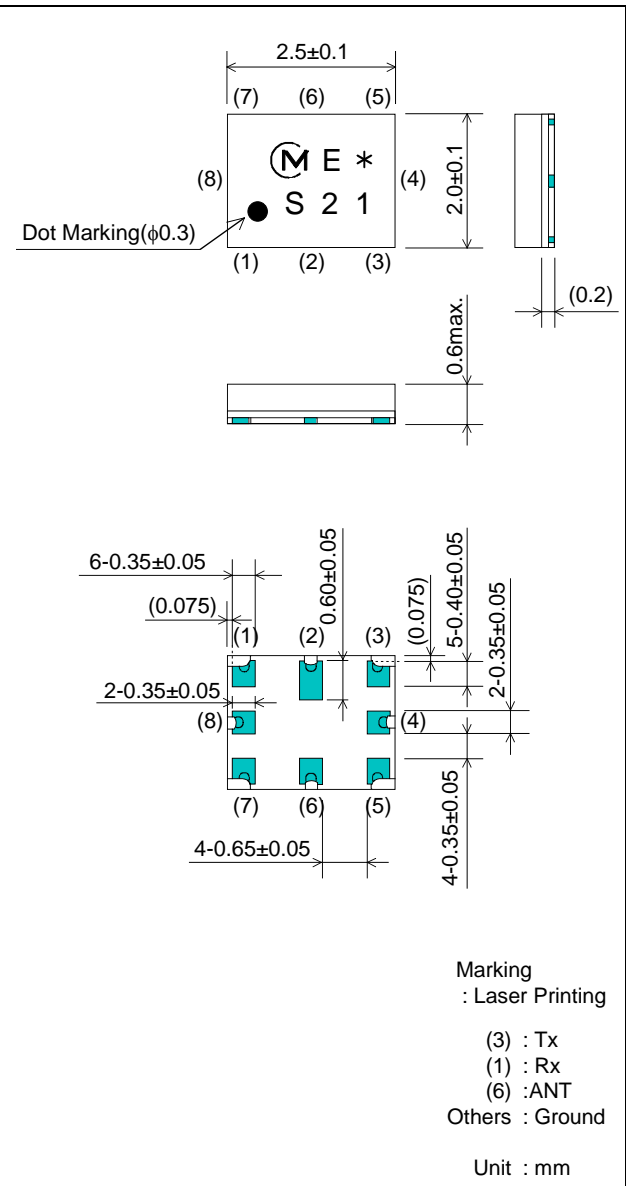


Item	Specification		
	-30 to 85°C	25±2°C	typ.
<b>Isolation</b>			
1) 824 to 849 MHz	55 dB min.	55 dB min.	60 dB
2) 869 to 894 MHz	45 dB min.	45 dB min.	48 dB
3) 1648 to 1698 MHz	40 dB min.	40 dB min.	54 dB

# SAW DPX FOR CDMA800/UMTS BC5 LR type

Murata part number :SAYEV836MAC0F00 [Tx→Rx]


## Frequency Performance

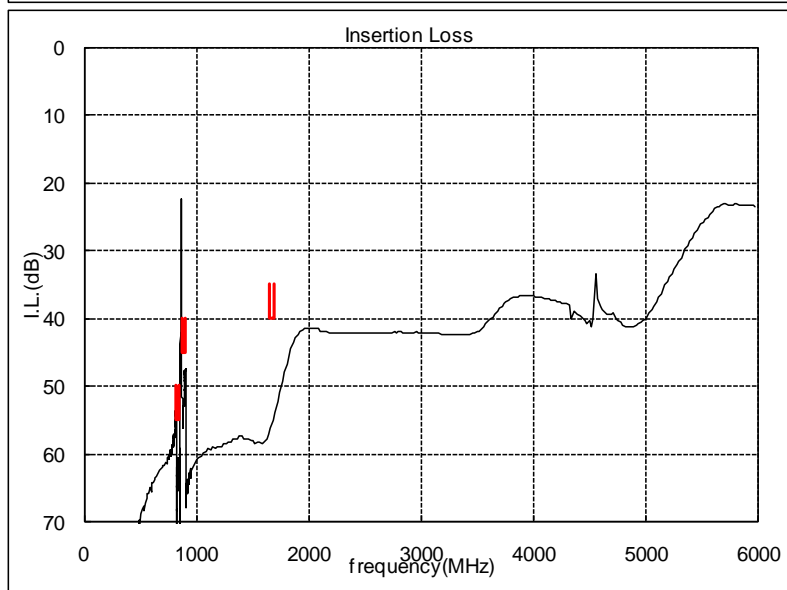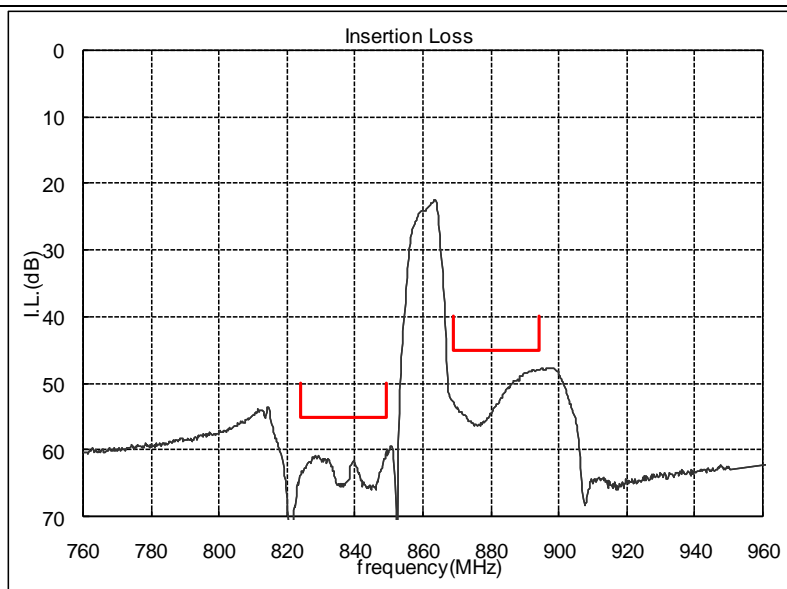


# SAW DPX FOR CDMA800/UMTS BC5 LR type

Murata part number :SAYEV836MAC0F00


## Dimensions of Carrier Tape

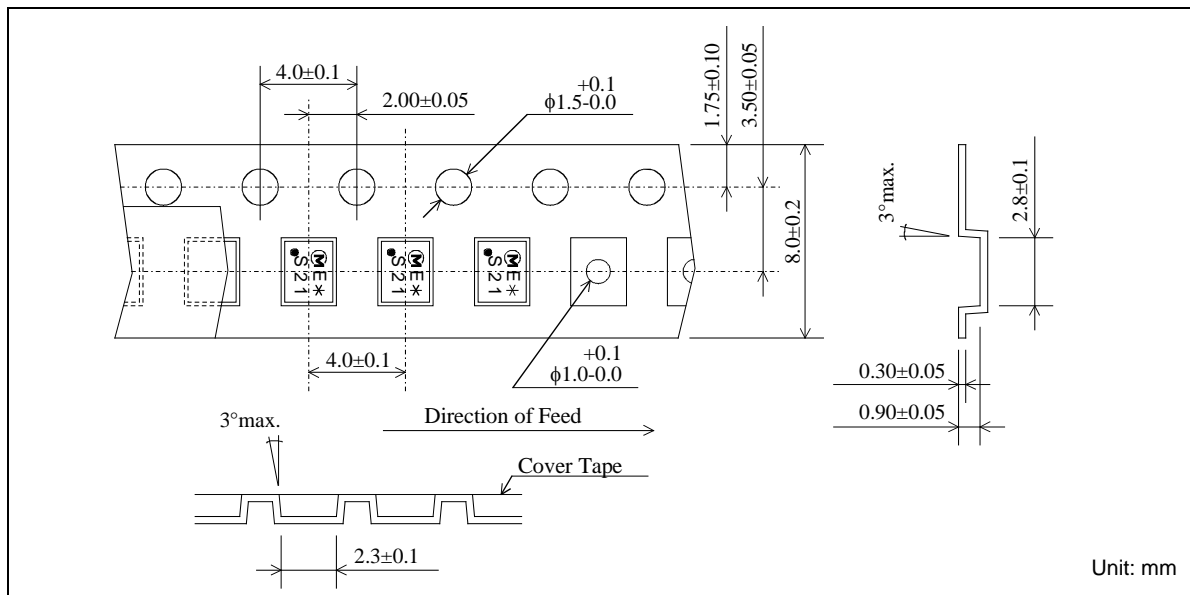

## Dimensions of Tape

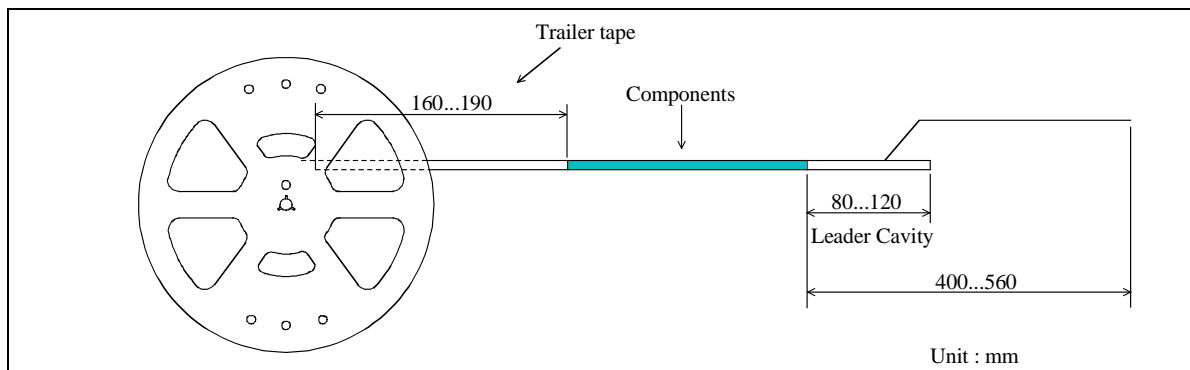


## Dimensions of Reel

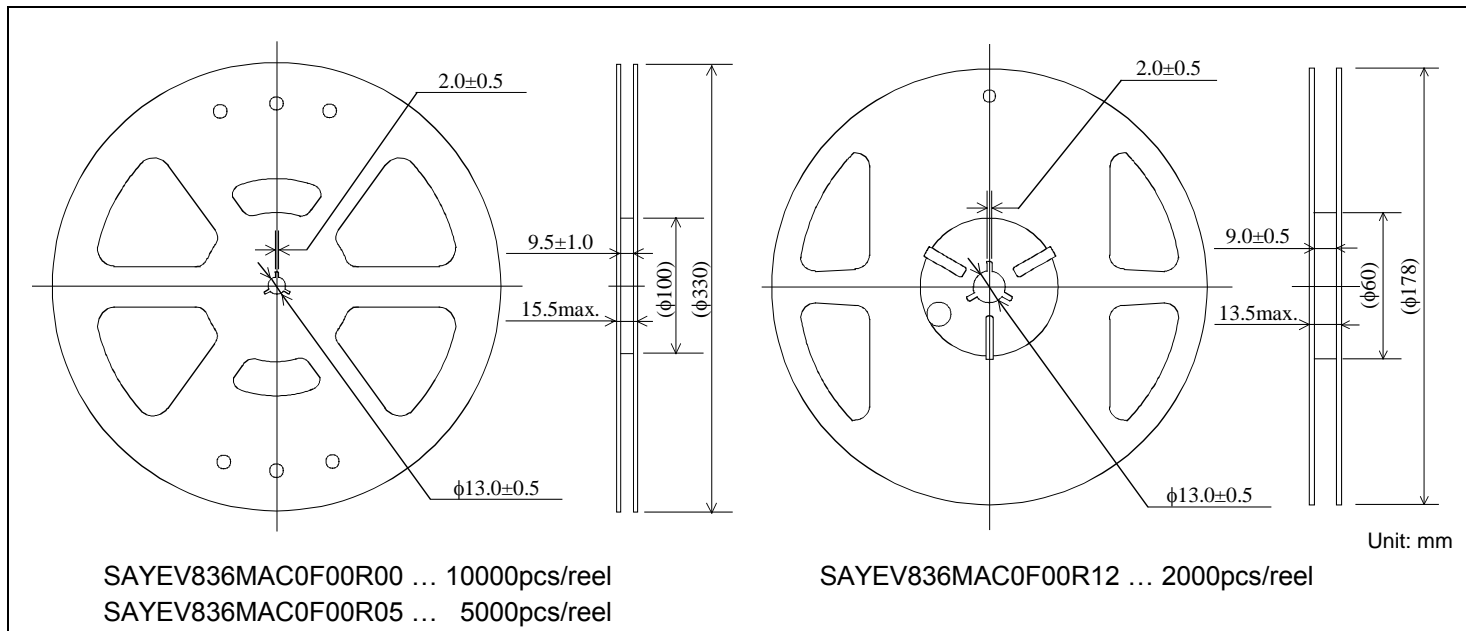


# SAW DPX FOR CDMA800/UMTS BC5 LR type

Murata part number :SAYEV836MAC0F00

## Recommended Land Pattern

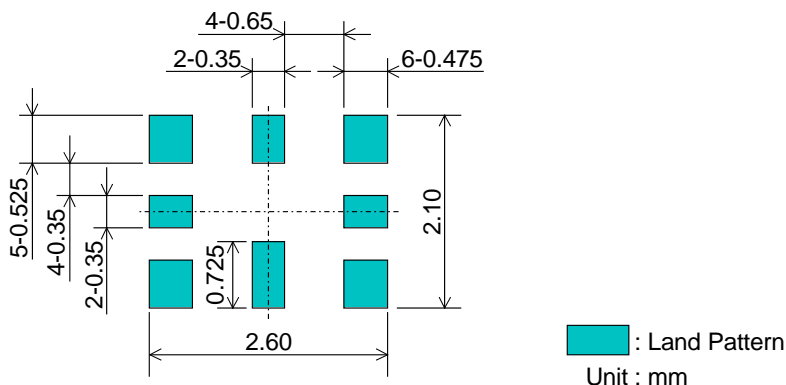

## Test Circuit

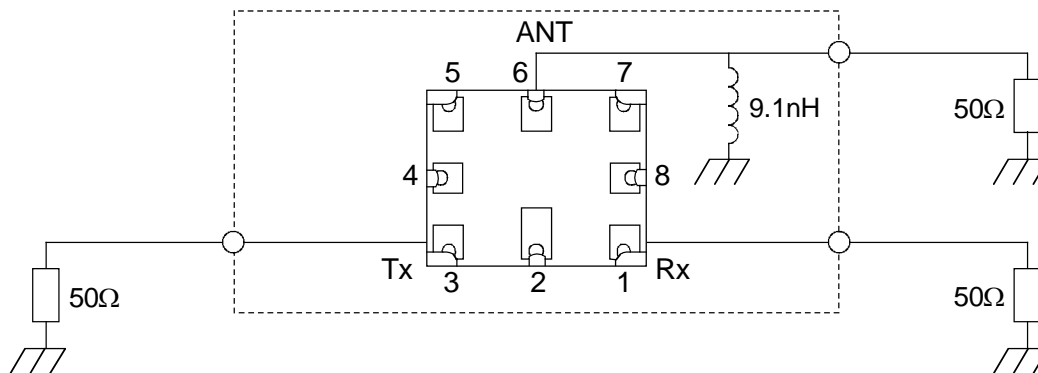

- This PDF Datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- This PDF Datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.